

E59xxx55-V02
Attenuator 100W
N / 4.3-10 / 7/16
DC-4000



Attenuator DC-4000 100W

Type	N F/M	E5930355-v02	E5930655-v02	E5931055-v02	E5931555-v02
	4.3-10 F/M	E5910355-v02	E5910655-v02	E5911055-v02	E5911555-v02
	7/16 F/M	E5950355-v02	E5950655-v02	E5951055-v02	E5951555-v02
Attenuation (dB)		3	6	10	15
Attenuation Tolerance (dB)		±0.7	±0.7	±0.7	±0.7

Type	N F/M	E5932055-v02	E5933055-v02	E5934055-v02	
	4.3-10 F/M	E5912055-v02	E5913055-v02	E5914055-v02	
	7/16 F/M	E5952055-v02	E5953055-v02	E5954055-v02	
Attenuation (dB)		20	30	40	
Attenuation Tolerance (dB)		±0.7	±0.8	±0.8	

Electrical Specifications

Frequency (MHz)	DC - 4000
PIM3 (dBc, @2x43dBm)	≤ -105
Impedance (Ω)	50
Return Loss (dB)	≥ 21
Max Input Power (W)	100

Mechanical and Environmental Specifications


Dimension (mm)	Ø60 x 150 (excluding connector and bracket)
Weight (kgs)	N F/M: 0.95 (including connector and bracket)
	4.3-10 F/M: 0.95 (including connector and bracket)
	7/16 F/M: 1.0 (including connector and bracket)
Ingress Protection	IP55
Operating Temperature (°C)	-55 to +125
Operating RH (%)	≤ 95

Packing Information


Packing Size (mm)	225 x 70 x 70
SKU (unit/inner carton)	50 pieces per inner carton/box

(D)251YY660
(D)261YY660
(D)261YY660


E59xxx55-V02
Attenuator 100W
N / 4.3-10 / 7/16
DC-4000

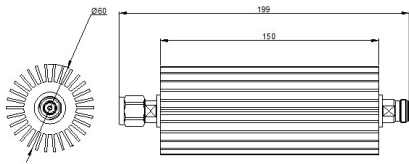

N F/M

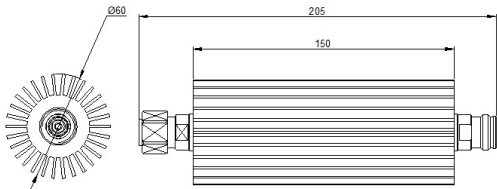

4.3-10 F/M

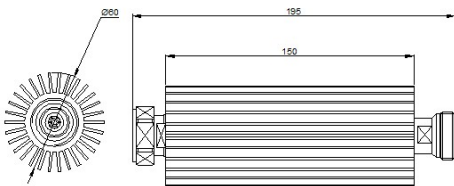

7/16 F/M