

E21xxx44-V02
Attenuator 50W
N / 4.3-10 / 7/16
698-4000



Attenuator 698-4000 50W

Type	N F/M	E2130344-v02	E2130544-v02	E2130644-v02	E2131044-v02
	4.3-10 F/M	E2110344-v02	E2110544-v02	E2110644-v02	E2111044-v02
	7/16 F/M	E2150344-v02	E2150544-v02	E2150644-v02	E2151044-v02
Attenuation (dB)		3	5	6	10
Attenuation Tolerance (dB)		±0.6	±1.0	±1.0	±1.0

Type	N F/M	E2131544-v02	E2132044-v02	E2133044-v02	
	4.3-10 F/M	E2111544-v02	E2112044-v02	E2113044-v02	
	7/16 F/M	E2151544-v02	E2152044-v02	E2153044-v02	
Attenuation (dB)		15	20	30	
Attenuation Tolerance (dB)		±1.0	±1.3	±1.3	

Electrical Specifications

Frequency (MHz)	698 - 4000
PIM3 (dBc, @2x43dBm)	≤ -160
Impedance (Ω)	50
Return Loss (dB)	≥ 19
Max Input Power (W)	50

Mechanical and Environmental Specifications


Dimension (mm)	176 x 176 x 68 (excluding connector and bracket)
Weight (kgs)	N F/M: 3.5 (including connector and bracket)
	4.3-10 F/M: 3.7 (including connector and bracket)
	7/16 F/M: 3.9 (including connector and bracket)
Ingress Protection	IP65
Operating Temperature (°C)	-40 to +65
Operating RH (%)	≤ 95

Packing Information


Packing Size (mm)	415 x 290 x 265
SKU (unit/inner carton)	4 pieces per inner carton/box

(D)8741Y660
(D)8841Y660
(D)8941Y660

E21xxx44-V02
Attenuator 50W
N / 4.3-10 / 7/16
698-4000

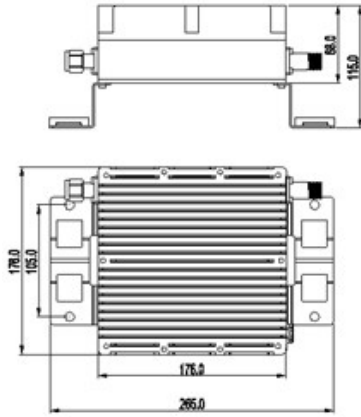

6-30dB

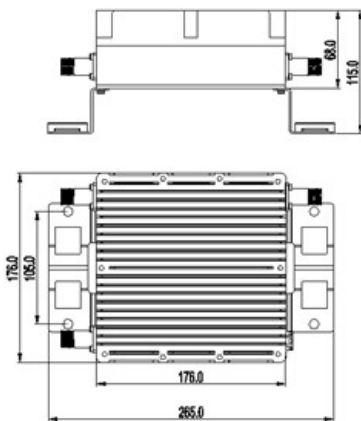

3dB