


H1112124-V04
Hybrid Combiner 4-in/4-out
PIM -160dBc Isolation 30dB
698-2700



4x4 Hybrid Combiner 698-2700 High Isolation

Preliminary

Type	H1112124-v02
Frequency (MHz)	698-2700
Coupling Loss (dB)	6 ±0.9
Insertion Loss (dB)	≤ 0.9
VSWR	≤ 1.25
Isolation (dB)	≥ 30
PIM3 (dBc, @2x43dBm)	≤ -160
Input Impedance (ohm)	50
Max. Input Power per Port(W)	500
Connector	4.3-10 Female
Weight (kgs) (including mounting bracket and connectors)	4.2
Dimension (mm)	355.3 x 100 x 57.4 (excluding mounting bracket and connectors)
Ingress Protection Class	IP65 (for outdoor and indoor)
Operating RH (%)	≤ 95
Operating Temperature (°C)	-30 to +75
Mounting	Built-in Bracket for wall mount or pole mount
Colour	Light Grey

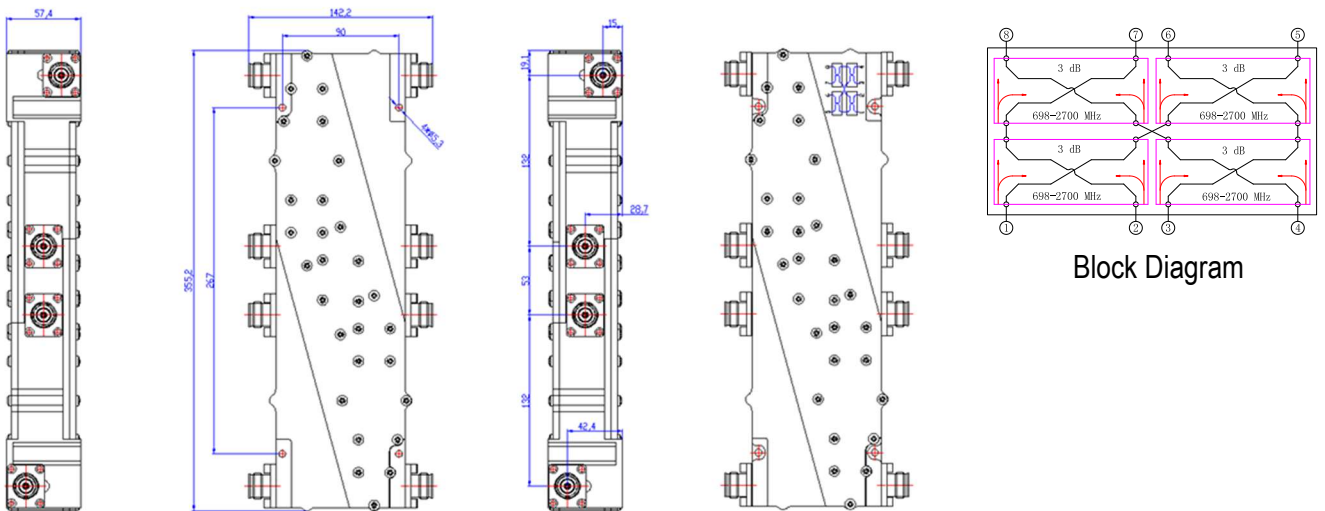

H1112124-V04
Hybrid Combiner 4-in/4-out
PIM -160dBc Isolation 30dB
698-2700

